



- **Engine:** MTU 16V4000G43S
- **Alternator:** Stamford/Leroy Somer /Hengsheng
- **Controller:** DeepSea/SmartGen /DEIF/ComAp

Genset

Model	JHM-1800GF
Voltage	277/480V
Frequency&Speed	60HZ;1800RPM
Genset Prime Power	1850kW/2313kVA
Genset Standby Power	2100kW/2625kVA

Name	16V4000G43S	Speed [rpm]	1800
Application Group	3G	Nominal power [kW]	2020
Dataset	Ref. 25°C/55°C	Nominal power [bhp]	2709
		Nominal power [kVA]	-
		Nominal power [kWel]	-
		Frequency [Hz]	60

Exhaust Regulations Fuel-consumption optimized;

Reference conditions

No.	Description	Index	Value	Unit
6	Intake air temperature		25	°C
7	Charge-air coolant temperature		55	°C
8	Barometric pressure		1000	mbar
9	Site altitude above sea level		100	m

1	Engine rated speed	A	1800	rpm
2	Reduction gear - Output speed	A	-	rpm
3	Mean piston speed		12.6	m/s
4	Continuous power ISO 3046 (10% overload capability) (design power DIN 6280, ISO 8528)	A	2020	kW
5	Fuel stop power ISO 3046	A	2222	kW
8	Mean effective pressure (MEP) (Continuous power ISO 3046)		17.7	bar
9	Mean effective pressure (MEP) (Fuel stop power ISO 3046)		19.4	bar

1	Intake air depression (new filter)	A	15	mbar
2	Intake air depression, max.	L	50	mbar
3	Exhaust back pressure	A	30	mbar
4	Exhaust back pressure, max.	L	85	mbar
5	Fuel temperature at fuel feed connection	R	25	°C
9	Fuel temperature at fuel feed connection, max. (w/o power reduction)	L	55	°C
10	Fuel temperature at fuel feed connection, max.	L	55	°C

No.	Description	Index	Value	Unit
17	Specific fuel consumption (be) - 100 % CP (+ 5 %; EN 590; 42.8 MJ/kg)	R	200	g/kWh
18	Specific fuel consumption (be) - 75 % CP (+ 5 %; EN 590; 42.8 MJ/kg)	R	203	g/kWh
19	Specific fuel consumption (be) - 50 % CP (+ 5 %; EN 590; 42.8 MJ/kg)	R	215	g/kWh
20	Specific fuel consumption (be) - 25 % CP (+ 5 %; EN 590; 42.8 MJ/kg)	R	253	g/kWh
21	Specific fuel consumption (be) - FSP (+ 5 %; EN 590; 42.8 MJ/kg)	R	202	g/kWh

6	Number of cylinders		16	-
7	Cylinder configuration: V angle		90	degrees (°)
8	Cylinder configuration: in-line vertical		-	-
10	Bore		170	mm
11	Stroke		210	mm
12	Displacement, cylinder		4.77	liter
13	Displacement, total		76.3	liter
14	Compression ratio		16.4	-

28	Standard flywheel housing flange (engine main PTO)		00	SAE
50	Static bending moment at standard flywheel housing flange, max.	L	15	kNm
51	Dynamic bending moment at standard flywheel housing flange, max.	L	75	kNm
29	Standard flywheel housing flange (reduction gearbox main PTO)		-	SAE
43	Flywheel interface (DISC)		21	-

Alternator

Pole No.	4-Pole
Exciter Type	Single bearing, Brushless, Self-excited
Power factor	0.8
Voltage adjust range	±5%
Insulation Grade	H
Protection Grade	IP23/22
Phase / wire	3 phase 4 wires

- ✧ Superior voltage waveform from two-thirds Pitch windings and skewed stator.
- ✧ Digital solid-state.volts-per-hertz voltage Regulator with +1% no-load to full-load regulation.


- ✧ NEMAMG1.JIANGHAO,and ANSI standards compliance for temperature rise and motor starting.
- ✧ Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- ✧ Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the generator field.
- ✧ Self-ventilated and dripproof construction.

Control Panel



The control module gives digital readouts of:

Generator voltage;
Output frequency;
Engine speed;
Battery voltage;
Engine hours run.

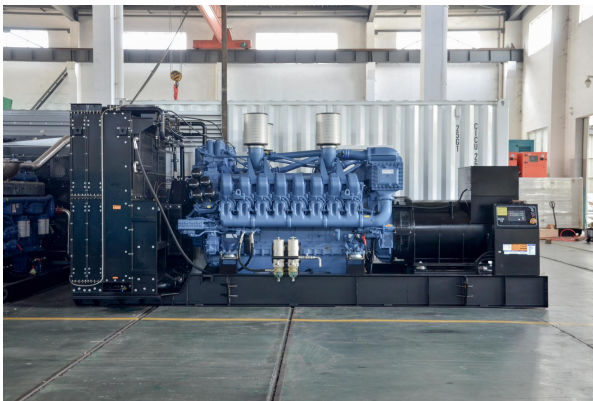

Dimension:6500*2260*2720mm

Weight:17000kg



Dimension:12000*2400*2900mm

Weight:20800kg

Fuel Tank Capacity:1000-3000L

The **control panel** is an Digital Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen and illuminated LEDs.

The control module has indicators for failure information:

Over speed/Low speed,
Emergency stop
Low oil pressure;
High water temperature
Failure to start
Battery charger failure

Automatic shutdown occurs under:

Low engine oil pressure;
High engine water temperature;
Over speed/Low speed;
Failure to start after three attempts.

Electrical system

- Maintenance-free and anti-explosion battery
- Standard breaker
- ABB breaker (optional)
- ATS (optional)
- Battery charger (optional)
- GMS monitoring (optional)

Packing

- Wrapping film packaging
- Tray packaging
- plywood box packaging

Jiangsu Jianghao Generator Co.,Ltd

Address: No.1 Xixu Road, Medical High-tech Zone,
Taizhou city, Jiangsu, China

Contact Person: Anthony Feng

Email: jhfsale@jhgenerator.com

WhatsApp: +86 18652649673

