



## Genset

Model	JHK-906GF
Voltage	277/480V
Frequency&Speed	60HZ;1800RPM
Prime Power	725kW/906kVA
Standby Power	800kW/1000kVA



Compression Ratio: 14.5:1

Bore: 159 mm

Stroke: 159 mm

Emission Certification:

Governor Regulation:  $\leq 3\%$

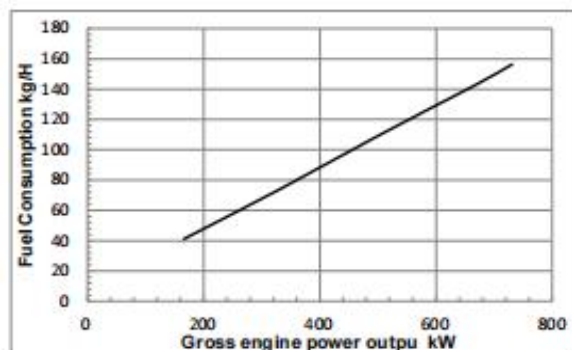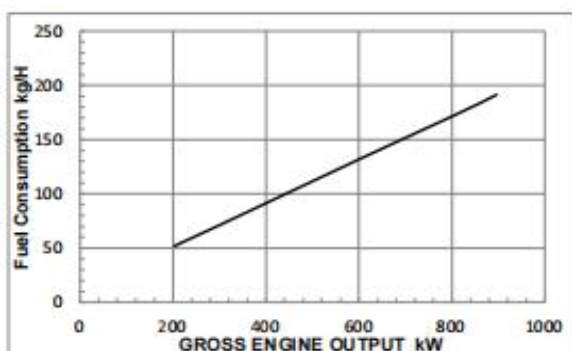

## Alternator

Pole No.	4-Pole
Exciter Type	Single bearing, Brushless, Self-excited
Power factor	0.8
Voltage adjust range	$\leq 5\%$
Insulation Grade	H
Protection Grade	IP23/22
Phase / wire	3 phase 4 wires

➤ **Engine: Cummins KTA38-G2**

➤ **Alternator: Stamford/Leroy Somer**  
**/Hengsheng**

➤ **Controller: DeepSea/SmartGen**  
**/DEIF/ComAp**

Aspiration: Turbocharged&Aftercooled

Displacement 38L

No. of Cylinders 12

Fuel System Cummins PT

OUTPUT POWER			CONSUMPTION		BFSC	
%	BHP	KW	Lb/h	kg/h	g/kW.h	Lb/BHP.h
<b>1800RPM</b>						
STANDBY						
100	1200	896	422	191	213	0.351
PRIME						
100	1085	810	382	173	214	0.352
75	814	608	294	133	219	0.361
50	543	405	204	92	228	0.375
25	271	203	115	52	256	0.423
<b>1500RPM</b>						
STANDBY						
100	980	731	345	156	214	0.352
PRIME						
100	890	664	313	142	214	0.352
75	667	498	240	109	218	0.360
50	445	332	163	74	223	0.367
25	222	166	91	41	248	0.409

- ✧ NEMAMG1.JIANGHAO, and ANSI standards compliance for temperature rise and motor starting.
- ✧ Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- ✧ Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the generator field.
- ✧ Self-ventilated and drip-proof construction.
- ✧ Superior voltage waveform from two-thirds pitch windings and skewed stator.
- ✧ Digital solid-state volts-per-hertz voltage regulator with +1% no-load to full-load regulation.

## Control Panel



**The control module gives digital readouts of:**

Generator voltage;  
Output frequency;  
Engine speed;  
Battery voltage;  
Engine hours run.

The **control panel** is an Digital Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen and illuminated LEDs.

**The control module has indicators for failure information:**

Over speed/Low speed,  
Emergency stop  
Low oil pressure;  
High water temperature  
Failure to start  
Battery charger failure



Dimension:4350\*1800\*2500mm  
Weight:7300kg



Dimension:5800\*2300\*2550mm  
Weight:11200kg  
Fuel Tank Capacity:1200L

**Automatic shutdown occurs under:**

Low engine oil pressure;  
High engine water temperature;  
Over speed/Low speed;  
Failure to start after three attempts.

## Electrical system

- Maintenance-free and anti-explosion battery
- Standard breaker
- ABB breaker (optional)
- ATS (optional)
- Battery charger (optional)
- GMS monitoring (optional)

## Packing

- Wrapping film packaging
- Tray packaging
- plywood box packaging

**Jiangsu Jianghao Generator Co.,Ltd**

Address: No.1 Xixu Road, Medical High-tech Zone,  
Taizhou city, Jiangsu, China

Contact Person: Anthony Feng

Email: [jhfsale@jhgenerator.com](mailto:jhfsale@jhgenerator.com)

WhatsApp: +86 18652649673

