



Genset


Model	JHK5-30GF
Voltage	230/400V
Frequency&Speed	50HZ;1500RPM
Prime Power	25kW/30kVA
Standby Power	27kW/34kVA

Compression Ratio: 18.0:1
Bore 102mm
Stroke 120mm
Governor Regulation: $\leq 3\%$

Aspiration: Naturally Aspirated
Displacement 3.9L
No.of Cylinders 4
Fuel System WF A /
Electronic Governor


Engine Performance Data @ 1500 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	30	41	221	8.0
PRIME POWER				
100	27	37	227	7.4
75	20	28	248	6.1
50	14	18	276	4.5
25	7	9	365	3.0
CONTINUOUS POWER				
TBD	TBD	TBD	TBD	TBD

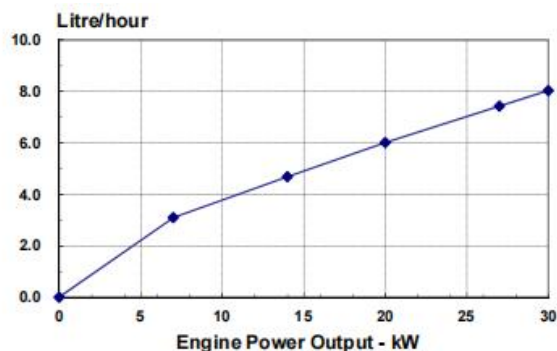

Engine Performance Data @ 1800 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	36	49	232	10.1
PRIME POWER				
100	33	45	235	9.4
75	25	34	251	7.5
50	17	22	274	5.5
25	8	11	396	4.0
CONTINUOUS POWER				
TBD	TBD	TBD	TBD	TBD

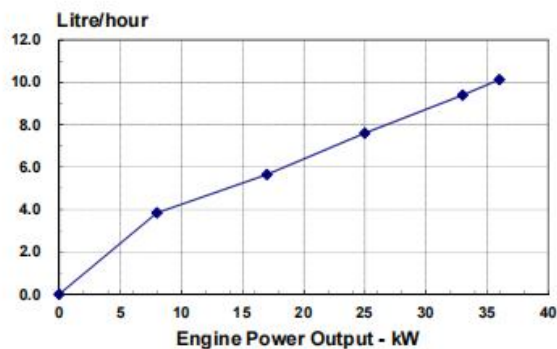

Alternator

Pole No. 4-Pole
Exciter Type Single bearing, Brushless,
Self-excited
Power factor 0.8
Voltage adjust range $\leq 5\%$
Insulation Grade H
Protection Grade IP23/22
Phase / wire 3 phase 4 wires

➤ Engine: Cummins 4B3.9-G12
➤ Alternator: Stamford/Leroy
Somer/Hengsheng
➤ Controller: DeepSea/SmartGen/
DEIF/ComAp

- ✧ NEMAMG1.JIANGHAO, and ANSI standards compliance for temperature rise and motor starting.
- ✧ Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- ✧ Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the generator field.
- ✧ Self-ventilated and drip-proof construction.
- ✧ Superior voltage waveform from two-thirds pitch windings and skewed stator.
- ✧ Digital solid-state volts-per-hertz voltage regulator with +1% no-load to full-load regulation.

Control Panel



The control module gives digital readouts of:

Generator voltage;
Output frequency;
Engine speed;
Battery voltage;
Engine hours run.

The **control panel** is an Digital Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen and illuminated LEDs.

The control module has indicators for failure information:

Over speed/Low speed,
Emergency stop
Low oil pressure;
High water temperature
Failure to start
Battery charger failure



Dimension:1650*800*1250mm
Weight:700kg



Dimension:2400*1000*1550mm
Weight:1300kg
Fuel Tank Capacity:240L

Automatic shutdown occurs under:

Low engine oil pressure;
High engine water temperature;
Over speed/Low speed;
Failure to start after three attempts.

Electrical system

- Maintenance-free and anti-explosion battery
- Standard breaker
- ABB breaker (optional)
- ATS (optional)
- Battery charger (optional)
- GMS monitoring (optional)

Packing

- Wrapping film packaging
- Tray packaging
- plywood box packaging

Jiangsu Jianghao Generator Co.,Ltd

Address: No.1 Xixu Road, Medical High-tech Zone,
Taizhou city, Jiangsu, China

Contact Person: Anthony Feng

Email: jhfsale@jhgenerator.com

WhatsApp: +86 18652649673

