



Genset

Model	JHP5-1480GF
Voltage	230/400V
Frequency&Speed	50HZ;1500RPM
Prime Power	1480kW/1850kVA
Standby Power	1600kW/2000kVA

The Perkins® 4000 Series family of 6, 8, 12 and 16 cylinder diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability.

The 4016TAG1A is a turbocharged, air-to-air charge-cooled, 16 cylinder vee form diesel engine.

Its premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market. The 4016TAG1A is specially tuned for improved load acceptance response in standby duty.

➤ **Engine: Perkins 4016TAG1A**


➤ **Alternator: Stamford/Leroy Somer
/Hengsheng**

➤ **Controller: DeepSea/SmartGen
/DEIF/ComAp**



Specification

Number of cylinders	16 60° Vee form			
Bore and stroke	160 x 190 mm		6.3 x 7.5 in	
Displacement	61.123 litres		3722 in³	
Aspiration	Turbocharged and air to air charge cooled			
Cycle	4 stroke			
Combustion system	Direct injection			
Compression ratio	13.6:1			
Rotation	Anti-clockwise, viewed from flywheel end			
Total lubricating capacity	237.2 litres		63 US gal	
Cooling system	Water-cooled			
	Electro unit		ElectropaK	
Total coolant capacity	95 litres	25 US gal	316 litres	85 US gal

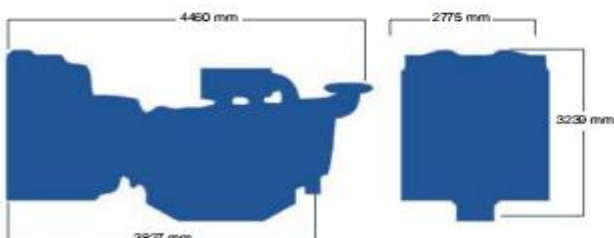

Engine package weights and dimensions

	Electro unit		ElectropaK	
Length	3302 mm	130 in	4460 mm	176 in
Width	1723 mm	68 in	2775 mm	109 in
Height	2128 mm	84 in	3239 mm	126 in
Weight (dry)	5570 kg	12279 lb	8010 kg	17659 lb

Speed rpm	Type of operation	Typical generator output (Net)		Engine power			
				Gross		Net	
		kVA	kWe	kWm	hp	kWm	hp
1500	Baseload power	1463	1170	1270	1703	1219	1635
	Prime power	1844	1476	1588	2130	1537	2061
	Standby (maximum)	2028	1622	1741	2334	1690	2266

The above ratings represent the engine performance capabilities within plus or minus 3% at the reference conditions equivalent to those specified in ISO 8528/1, ISO 3046/1, BS 5514/1.

Ratings conditions: 25°C air inlet temperature, barometer pressure 100 kPa, relative humidity 30%. Please consult your distributor or the factory for ratings in ambient conditions. Note: For full ratings please refer to Perkins Engines Company Limited. All electrical ratings are based on an average alternator efficiency and a power factor of 0.8. Fuel specification: BS 2869 Class A1 + A2 or ASTM D975 No 2D.

Rating definitions

Continuous baseload: Power available for continuous full load operation. No overload is permitted. Prime power: Power available for variable load with an average load factor not exceeding 80% of the prime power rating in any 24 hour period. Overload of 10% permitted for 1 hour in every 12 hours operation. Standby (maximum): Power available at variable load in the event of a main power network failure for a maximum of 500 hours per year. No overload is permitted.

Percent of prime power	Fuel consumption at 1500 rpm g/kWh
Standby (maximum)	207
Prime power	205
Baseload power	199
75%	198
50%	198
25%	218

Fuel system

- Direct fuel injection system with fuel lift pump
- Digital governing to ISO 8528-5 class G2 with isochronous capability
- Full-flow spin-on filters

Lubrication system

- Wet full aluminium sump with filler and dipstick
- Full flow spin-on oil filters

Cooling system

- Two twin thermostats
- System designed for ambient temperatures of up to 50°C

Alternator

Pole No.	4-Pole
Exciter Type	Single bearing, Brushless, Self-excited
Power factor	0.8
Voltage adjust range	≤5%
Insulation Grade	H
Protection Grade	IP23/22
Phase / wire	3 phase 4 wires

- ✧ NEMAMG1.JIANGHAO, and ANSI standards compliance for temperature rise and motor starting.
- ✧ Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- ✧ Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the generator field.
- ✧ Self-ventilated and drip-proof construction.
- ✧ Superior voltage waveform from two-thirds pitch windings and skewed stator.
- ✧ Digital solid-state volts-per-hertz voltage regulator with +1% no-load to full-load regulation.

Control Panel



The control module gives digital readouts of:

Generator voltage;
Output frequency;
Engine speed;
Battery voltage;
Engine hours run.

The **control panel** is an Digital Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen and illuminated LEDs.

The control module has indicators for failure information:

Over speed/Low speed,
Emergency stop
Low oil pressure;
High water temperature
Failure to start
Battery charger failure



Dimension:5700*2400*2700mm
Weight:13500kg



Dimension:12000*2400*2900mm
Weight:17300kg
Fuel Tank Capacity:1000-3000L

Automatic shutdown occurs under:

Low engine oil pressure;
High engine water temperature;
Over speed/Low speed;
Failure to start after three attempts.

Electrical system

- Maintenance-free and anti-explosion battery
- Standard breaker
- ABB breaker (optional)
- ATS (optional)
- Battery charger (optional)
- GMS monitoring (optional)

Packing

- Wrapping film packaging
- Tray packaging
- plywood box packaging

Jiangsu Jianghao Generator Co.,Ltd

Address: No.1 Xixu Road, Medical High-tech Zone,
Taizhou city, Jiangsu, China

Contact Person: Anthony Feng

Email: jhfsale@jhgenerator.com

WhatsApp: +86 18652649673

